

#### New (USNO.11) hotel lock

Applied places: Hotel college To work in an office

can choose colour:







Titanium gold



Nickle brushed

3D bright dark

Unlocking method:







# Lock appearance:



Front lock body Back lock body

#### Available lock finish:



#### Features:



- Classic and noble design
- Glass design for card sensing area
- Double layer composite lock structure, strong and durable
- PVD coating technology adopted
- Using American standard B lock core, with anti-plug oblique tongue alarm function, combined with combined oblique tongue abnormal alarm design, double guarantee, double safety;
- Set all levels of privilege through software, store large capacity of unlocking records
- Imported electronic components for PCB, fully automatic SMT process, and silicone filling technology adopted
- Fit for door thickness: 38-71mm

# Technical parameters:

Working voltage: DC6V (4AA batteries)

Working temperature: -15°C~50°C

Working humidity: 45-85%RH

Static power consumption: <50µA

Dynamic power consumption: <200mA

Service life of battery: 12-18 months of using based on 4 AA batteries

(about 15000 times of unlocking)

Low voltage alarm: less than 4.5V, there will be beep sound heard when unlocking

and it still supports about 100 times of unlocking

Unlocking records: latest 828 records reserved, and there is also unlocking record


for mechanical key

Mechanical key for emergency use


Fit for door thickness: 38-71mm


Basic parameters


### Drilling diagram: Mortise B

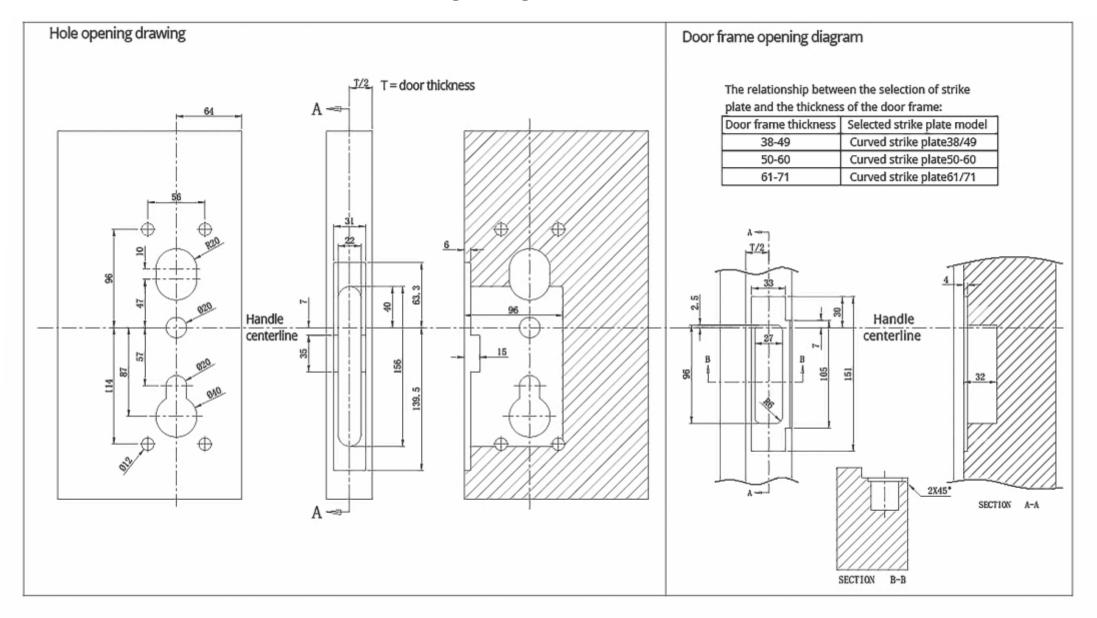


# Mortise B

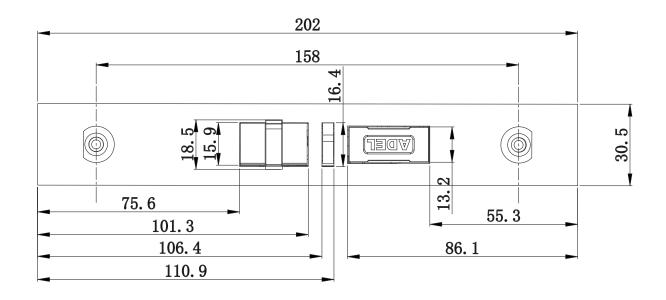

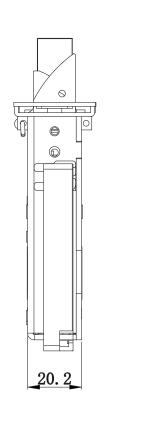

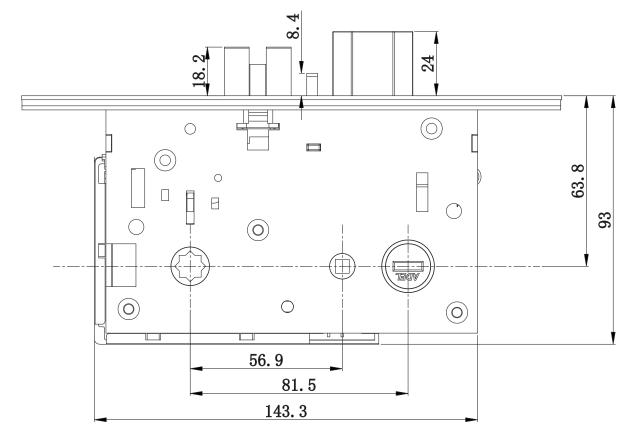

## Drilling diagram: Mortise thin B

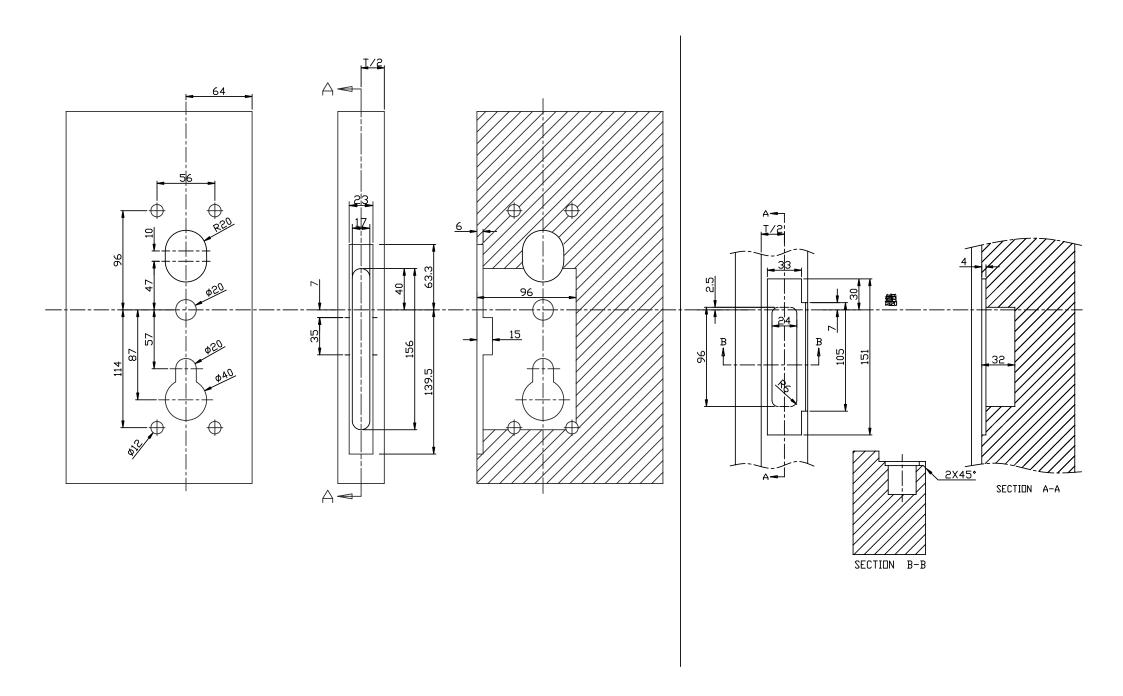

### Mortise thin B

